
TIP866-TM-30

Transition Module for TIP866/TIP867 with 16 RJH Connectors

Version 1.0

User Manual

Issue 1.3

April 2003

D75866861

TIP866-TM-30

Transition Module for TIP866 and TIP867 with 16 RJH Connectors

This document contains information, which is proprietary to TEWS TECHNOLOGIES GmbH. Any reproduction without written permission is forbidden.

TEWS TECHNOLOGIES GmbH has made any effort to ensure that this manual is accurate and complete. However TEWS TECHNOLOGIES GmbH reserves the right to change the product described in this document at any time without notice.

TEWS TECHNOLOGIES GmbH is not liable for any damage arising out of the application or use of the device described herein.

Style Conventions

Hexadecimal characters are specified with prefix 0x, i.e. 0x029E (that means hexadecimal value 029E).

For signals on hardware products, an 'Active Low' is represented by the signal name with # following, i.e. IP_RESET#.

©1998-2003 by TEWS TECHNOLOGIES GmbH

IndustryPack is a registered trademark of GreenSpring Computers, Inc

Issue	Description	Date
1.0	First Issue	September 1997
1.1	Redesign	January 1998
1.2	Add cable TA106-10	June 2002
1.3	Completion "Technical Specification"	April 2003

Table of Contents

1	PRODUCT DESCRIPTION.....	5
2	TECHNICAL SPECIFICATION.....	6
3	CONNECTOR X1 PIN ASSIGNMENT.....	7
4	RJ45 PIN ASSIGNMENT.....	9
5	ASSEMBLY DRAWING.....	10

Table of Figures

FIGURE 2-1 : TECHNICAL SPECIFICATION.....	6
FIGURE 3-1 : CONNECTOR X1 AND CONNECTOR X2 PIN ASSIGNMENT.....	8
FIGURE 4-1 : PIN ASSIGNMENT OF RJH CONNECTOR TIP866-TM-30 CHANNEL 1 AND 16.....	9
FIGURE 4-2 : RJH PINNING.....	9
FIGURE 5-1 : ASSEMBLY DRAWING.....	10

1 Product Description

The TIP866-TM-30 is a complete interface solution for the TIP866-10 (8 serial channels RS232) and the TIP867-10 (8 serial channels RS485). Two TIP866-10 or TIP867-10 can be connected to one TIP866-TM-30. The TIP866-TM-10 comes with two TA106-10 cables (0.8m ribbon cable with 50 pin ribbon cable connectors).

The 16 serial ports of the two TIP866-10 or TIP867-10 are routed to 16 4pin RJH connectors located in the 6U/4TE front panel of the TIP866-TM-30.

Jumper fields are provided for each channel to select termination for the RS485 (Jn1: 1-2, 3-4).

A two pin screw terminal (X9) can be used to supply the on board termination for RS485.

TXD, RXD and GND are supported for each of the 8 serial channels of the TIP866-10 (RS232).

DX+/- and GND are supported for the TIP867-10 (RS485).

This transition module can also be used with the IP-Octals.

2 Technical Specification

Board Size	233 mm x 80 mm
Front panel	6U / 4TE front panel with 16 4pin RJH connectors
Interface to IP	2 connectors for 50 conductor flat cable
Cable	2 TA106-10 (0.8m ribbon cable with 50 pin ribbon cable connectors)
Power Supply	+5V / GND by 2 pin screw terminal Power only required supplying on board termination. Fuse protected by a 1A Multifuse.
MTBF	459746h

Figure 2-1 : Technical Specification

3 Connector X1 Pin Assignment

Connector X1			Connector X2		
X1 Pin	TIP866-10 (RS232)	TIP867-10 (RS485)	X1 Pin	TIP866-10 (RS232)	TIP867-10 (RS485)
1	GND1	GND1	1	GND9	GND9
2	TXD1	DX1-	2	TXD9	DX9-
3	RXD1	DX1+	3	RXD9	DX9+
4	Nc	Nc	4	Nc	Nc
5	Nc	Nc	5	Nc	Nc
6	GND2	GND2	6	GND10	GND10
7	TXD2	DX2-	7	TXD10	DX10-
8	RXD2	DX2+	8	RXD10	DX10+
9	Nc	Nc	9	Nc	Nc
10	Nc	Nc	10	Nc	Nc
11	GND3	GND3	11	GND11	GND11
12	TXD3	DX3-	12	TXD11	DX11-
13	RXD3	DX3+	13	RXD11	DX11+
14	Nc	Nc	14	Nc	Nc
15	Nc	Nc	15	Nc	Nc
16	GND4	GND4	16	GND12	GND12
17	TXD4	DX4-	17	TXD12	DX12-
18	RXD4	DX4+	18	RXD12	DX12+
19	Nc	Nc	19	Nc	Nc
20	Nc	Nc	20	Nc	Nc
21	GND5	GND5	21	GND13	GND13
22	TXD5	DX5-	22	TXD13	DX13-
23	RXD5	DX5+	23	RXD13	DX13+
24	Nc	Nc	24	Nc	Nc
25	Nc	Nc	25	Nc	Nc
26	GND6	GND6	26	GND14	GND14
27	TXD6	DX6-	27	TXD14	DX14-
28	RXD6	DX6+	28	RXD14	DX14+
29	Nc	Nc	29	Nc	Nc
30	Nc	Nc	30	Nc	Nc
31	GND7	GND7	31	GND15	GND15
32	TXD7	DX7-	32	TXD15	DX15-
33	RXD7	DX7+	33	RXD15	DX15+
34	Nc	Nc	34	Nc	Nc
35	Nc	Nc	35	Nc	Nc
36	GND8	GND8	36	GND16	GND16
37	TXD8	DX8-	37	TXD16	DX16-

Connector X1			Connector X2		
X1 Pin	TIP866-10 (RS232)	TIP867-10 (RS485)	X1 Pin	TIP866-10 (RS232)	TIP867-10 (RS485)
38	RXD8	DX8+	38	RXD16	DX16+
39	nc	nc	39	Nc	nc
40	nc	nc	40	Nc	nc
41	nc	nc	41	Nc	nc
42	nc	nc	42	nc	nc
43	nc	nc	43	nc	nc
44	nc	nc	44	nc	nc
45	nc	nc	45	nc	nc
46	nc	nc	46	nc	nc
47	nc	nc	47	nc	nc
48	nc	nc	48	nc	nc
49	nc	nc	49	nc	nc
50	nc	nc	50	nc	nc

nc = not connected on the TIP866-TM-30

Figure 3-1 : Connector X1 and Connector X2 Pin Assignment

4 RJ45 Pin Assignment

Pin No. RJH	RS232	RS485
1	GND	GND
2	RXD	DX+
3	TXD	DX-
4	GND	GND

Figure 4-1 : Pin Assignment of RJH Connector TIP866-TM-30 Channel 1 and 16

Jn1: n = 1 to 16 identifies jumper fields for serial channel 1 to 16.

GND of each of the 16 RJH connectors is routed separately to X1 / X2.




Figure 4-2 : RJH Pinning

5 Assembly Drawing

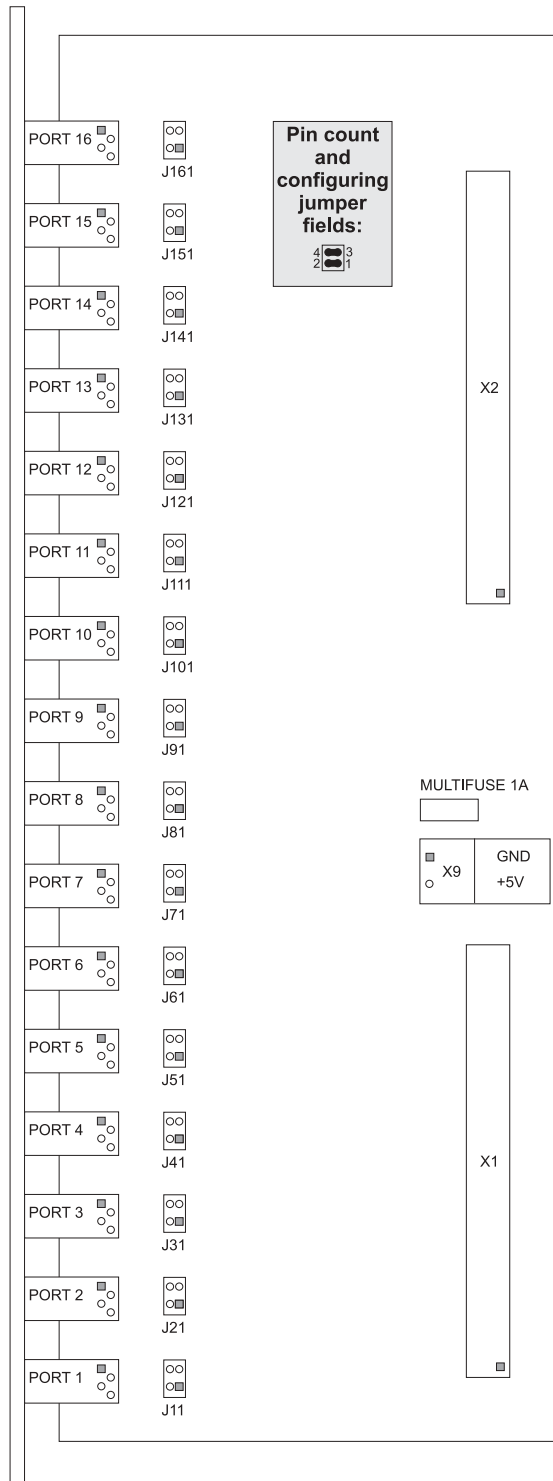


Figure 5-1 : Assembly Drawing