


# MULTI-I/O AVIONICS PMC CARD

## Data Sheet



MODEL: BU-65590F/M

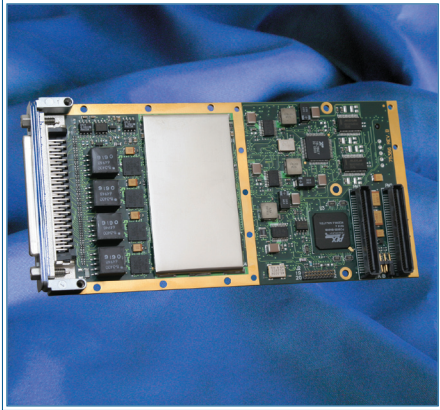

### Features

- Conduction or Air Cooled
- Multiple Configuration Options:
  - 4 Dual Redundant 1553 Channels
  - 16 Receive 429 Channels
  - 6 Transmit 429 Channels
  - 2 RS-232 Serial IO Channels
  - 2 RS-422/485 Serial IO Channels
  - 6 User-Programmable Digital I/O's
- IRIG-B Time Code Input
- 48-bit / 1 $\mu$ s Time Stamp
- IRIG 106 Chapter 10 Monitor Format
- DMA Engine for Low CPU and PCI Utilization
- Shock and Vibration Tested
- Front or Rear I/O
- E<sup>2</sup>MA BC/RT/MT Architecture
  - API Compatible with DDC's Enhanced Mini-ACE<sup>®</sup> BU-69090S Library
- 1 MB Memory w/parity per 1553 Channel
- Built In Self Test
- VxWorks, Linux & Windows 2000/XP Support
- Applications
  - Displays
  - Flight Data Recorders
  - Embedded Systems
  - Mission Computers
  - Communication Links
  - Munitions

### DESCRIPTION

The BU-65590F/M is a multi-protocol PMC card providing new levels of performance and flexibility for systems interfacing to a MIL-STD-1553 or ARINC 429 data bus. There are up to four dual redundant MIL-STD-1553 channels operating in BC, RT, MT, or RT/MT modes. Sixteen ARINC 429 receive channels and six ARINC 429 transmit channels operate in high/low speed with automatic slew rate adjustment. The card also contains six digital discrete I/Os, an IRIG-B time synchronization input, 2 RS-422/485 Serial I/O channels, and up to 2 RS-232 Serial I/O Channels. The combination of multiple I/O on one card saves valuable PMC sites on host computers.

The 1553 interface used on this card is DDC's Extended Enhanced Mini-ACE (E<sup>2</sup>MA) architecture which is API compatible with the industry standard, field proven, Enhanced Mini-ACE software. The card includes the MIL-STD-1553 BU-69092SX Enhanced Mini-ACE<sup>®</sup> Plus C Software Development Kit (SDK), and the ARINC 429 Multi-IO C SDK, along with samples and detailed documentation.

### APPLICATIONS

The card's rugged construction and ability to operate from -40°C to +85°C at the thermal rail make it ideal for use in mission computers, flight data recorders, ground vehicles, and other embedded systems that require a military grade card. The card can be ordered with front or rear I/O and can be used in conduction or air cooled applications.


Make Sure the next Card you purchase has...



## Quick Specifications

PARAMETER	MIN	TYP	MAX	UNITS	PARAMETER	MIN	TYP	MAX	UNITS
<b>ABSOLUTE MAXIMUM RATINGS</b>					Serial I/O (+5V)				
<b>Supply Voltage</b>					Idle				
+5V	0		6.0	V	100% Transmitter Duty Cycle				
+12V	0		18.0	V	<b>THERMAL</b>				
-12V	0		-18.0	V	<b>Operating Temperature</b>				
<b>POWER SUPPLY REQUIREMENTS</b>					BU-65590F/MX-2A0				
<b>Voltages/Tolerance</b>					(measured at component case)				
+5V	4.75	5	5.25	V	BU-65590F/MX-2C0				
+12V	11.40	12.0	12.60	V	(measured on thermal rail)				
-12V	-11.40	-12.0	-12.60	V	BU-65590F/MX-3L0 (ambient)				
<b>CURRENT DRAIN</b>					<b>Storage Temperature</b>				
<b>BU-65590F/M0</b>					BU-65590F/MX-20/30				
MIL-STD-1553 & Serial I/O (+5V)					(without LED's contact factory)				
0% Transmitter Duty Cycle					BU-65590F/MX-20/30				
75% Transmitter Duty Cycle					(with LED's)				
ARINC 429 & IRIG (+12V)					<b>MECHANICAL DESIGN</b>				
Idle					<b>Shock:</b>				
100% Transmitter Duty Cycle					Three pulses, half sine on six (6) axes				
ARINC 429 & IRIG (-12V)					40g's, 11 mSec/axes				
Idle					<b>Vibration:</b>				
100% Transmitter Duty Cycle					Random input, one hour each axis				
<b>BU-65590F/M1</b>					40g's 11 mSec/axes, three hours total, 15 to 2000 Hz				
MIL-STD-1553 & Serial I/O (+5V)					14g's rms				
0% Transmitter Duty Cycle					<b>PHYSICAL CHARACTERISTICS</b>				
75% Transmitter Duty Cycle					<b>Size</b>				
ARINC 429 & IRIG (+12V)					5.863 x 2.913				
Idle					(148.9 x 74)				
100% Transmitter Duty Cycle					in.				
ARINC 429 & IRIG (-12V)					(mm)				
Idle					<b>Weight</b>				
100% Transmitter Duty Cycle					BU-65590F0				
<b>BU-65590F/M2</b>					5.1 (145)				
ARINC 429 & IRIG (+12V)					BU-65590F1				
Idle					5.0 (141)				
100% Transmitter Duty Cycle					BU-65590F2				
ARINC 429 & IRIG (-12V)					4.75 (135)				
Idle					oz. (g)				
100% Transmitter Duty Cycle					oz. (g)				

**Note:** For full specifications and additional information refer to the *Hardware Manual for the BU-65590F-M Multi-I/O PMC Card* (#MN-65590FX-001), the *Software User's Manual for ARINC 429 Multi-IO Cards* (#MN-4292SX-001) and the *BU-69092SX EMACE PLUS C SDK* Software manual (#MN-69092SX-001).

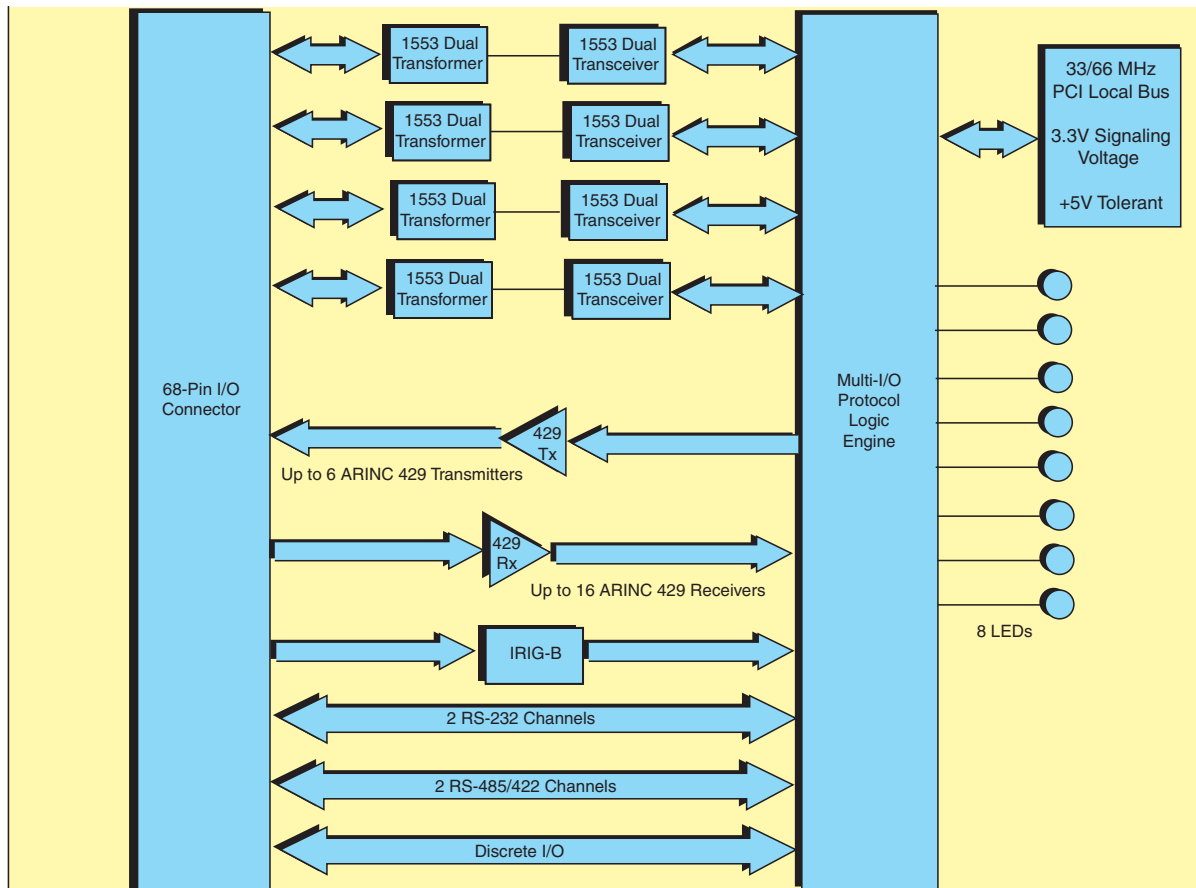

**Figure 1. BU-65590F/M Block Diagram**

## COTS Solution for Avionics

- Conduction or Air Cooled PMC Card with Front or Rear I/O
- 32-bit, 33/66 MHz PCI Local Bus Spec Rev 3.0 compliant
- 48-bits, 1  $\mu$ s resolution, distributed among all channels
- 6 Digital Discrete I/O

## Two Operating Temperature Ranges

- Industrial Operating Temperature Range: -40 to +85° C
- Commercial Operating Temperature Range: 0 to +55° C

## MIL-STD-1553

- One to Four Dual Redundant MIL-STD-1553 Channels
- 1 MB RAM with Parity per 1553 Channel
- Transformer Coupled Channels
- High Level 1553 C Software Development Kit
- BC/RT/MT/RTMT Operating Modes
- User-Definable Interrupts

### 1553 Bus Controller

- Minor and Major Frame Scheduling to Control Timing of 1553 Messages
- High and Low Priority Asynchronous Message Insertion
- Modify Messages or Data while BC is running
- Conditional Messages or Subroutines based on User Defined Conditions
- Multiple BC retry programmable options
- Error Detection as per MIL-STD 1553 Standard

### 1553 Remote Terminal

- Choice of Sub-address Single Message, Double Buffering, Circular Buffering or Global Circular Buffering
- Message Status, Time Tag, Command Word, Data Words
- Programmable Command Illegalization
- Programmable Busy by Sub-address
- Programmable RT Address via connector Hardware or Software
- Option for RT AUTO-BOOT with BUSY Bit Set

### 1553 Bus Monitor

- IRIG-106 Chapter 10 Compatibility
- DMA Engine for Super Low PCI and CPU Utilization
- Selective Message Monitor
- Filter Based on RT Address, T/R bit, Sub-Address
- Message Status, Time Tag, Command Word, Data Words
- Programmable Interrupt Conditions
- Simultaneous RT/Message Monitor Option

## ARINC 429

- High / Low Speed Operation with automatic slew rate adjustment
- 16 Receive Channels, 6 Transmit Channels
- FIFO or Mailbox Reception Methods
- FIFO or Scheduled Transmission Methods
- 48-bit Message Time Tagging and Message Filtering
- User Definable Interrupts

## Serial I/O

- 2 channels of user selectable RS-422/485
- Up to 2 channels of RS-232
- Programmable baud rate up to 921.6 Kbps
- RS-232 RTS/CTS & DTR/DSR serial data flow control signals
- Autonomous RS-485 Half Duplex data transceiver direction control signal

## Built In Self-Test Capability

- Ram Self Test
- Register Self Test
- Online Loopback Test
- Capability to Test Transmitter Timeout Function

## Supporting Software

- Complete C Software Development Kits (SDK) for MIL-STD-1553 and ARINC 429
- Windows 2000, Windows XP, Linux, and VxWorks support
- Abstracts all low level hardware
- High-Level Register/Memory Initialization Routines
- Open/Access/Close Model

## VxWorks Driver

- Designed for Version 5.x and 6.x of Wind River's VxWorks
- Version for Power PC and x86

## Linux Driver

- Loadable Linux kernel version 2.6.x Driver Module
- Version for Power PC, and x86

## Windows Driver

- Plug and Play Windows 2000/XP Device Driver

# ORDERING INFORMATION

**BU-65590XX-XX XX**

**Conformal Coating:**

- N = Acrylic
- U = Polyurethane
- Blank = None

**Test Criteria:**

- 0 = none

**Environmental & Operating Temperature Options:**

- 2A = Rugged Air-Cooled Card with Bezel; Temperature Range: -40°C to +85°C (measured at component case)
- 2C = Rugged Conduction-Cooled Card; Temperature Range: -40°C to +85°C (only available with the "Mx" Rear I/O model, measured at thermal rail)
- 3L = Non-Rugged Air-Cooled Card with Bezel; Temperature Range: 0°C to +55°C (ambient)

**I/O Options**

OPTION #	CHANNEL NUMBER & TYPE						
	1553	ARINC 429 Rx	ARINC 429 Tx	RS-232	RS-422/485	Discrete I/O	IRIG-B Input
0 =	4	8	4	2 (note 2)	2	6	Yes
1 =	2	8	6 (note 3)	2	2	6	Yes
2 =	-	16	6 (note 3)	-	2	6	Yes

**Card Type:**

- F = Front Panel I/O PMC
- M = Rear I/O PMC (Pn4 connector)

**Base Model Number:**

BU-65590 = Multi-IO Avionics Card

**Notes:**

1. These products contain tin-lead solder.
2. The BU-65590M0 contains one RS-232 channel.
3. The BU-65590FX contains a maximum of 4 ARINC-429 Tx Channels

**Included Software:**

**BU-69092SX - MIL-STD-1553 EMACE Plus C Software Development Kit**

- Operating System:
  - 0 = Windows 2000/XP
  - 1 = Linux
  - 2 = VxWorks

**DD-42992SX - ARINC 429 Multi-IO C Software Development Kit**

- Operating System:
  - 0 = Windows 2000/XP
  - 1 = Linux
  - 2 = VxWorks

**Optional Cable for Front Panel I/O PMC:**

**DDC-75530-X**

- 1 = Cable for the BU-65590F0
- 2 = Cable for the BU-65590F1
- 3 = Cable for the BU-65590F2

**Optional Connector for the BU-65590F0, F1, and F2:**

**5301-0382-0001** = TYCO Connector and Backshell



The information in this **Data Sheet** is believed to be accurate; however, no responsibility is assumed by Data Device Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.



**Call DDC or visit [www.ddc-web.com](http://www.ddc-web.com) for a quote today:**

105 Wilbur Place, Bohemia, New York, U.S.A. 11716-2426  
**For Technical Support - 1-800-DDC-5757 ext. 7771**  
**Headquarters, N.Y., U.S.A.** - Tel: (631) 567-5600, Fax: (631) 567-7358  
**United Kingdom** - Tel: +44-(0)1635-811140, Fax: +44-(0)1635-32264

**France** - Tel: +33-(0)1-41-16-3424, Fax: +33-(0)1-41-16-3425  
**Germany** - Tel: +49-(0)89-1500-12-11, Fax: +49(0)89-1500 12-22  
**Japan** - Tel: +81-(0)3-3814-7688, Fax: +81-(0)3-3814-7689